

# Intermediate plates with pilot-operated double check valve type GRV (size 4)

operating pressure $p_{\max}$	320 bar
volume flow $V_{\max}$	20 L/min



## Product characteristics

Check valves belong to the group of stop valves. They block the oil flow in one direction while enabling it in the other direction. When closed, they are leakage-free tight.

The hydraulically unlockable double check valve type GRV blocks the flow of the hydraulic fluid in one or both directions.

### Features and benefits:

- simple acting or double acting
- check valve in line A, in line B or in line A and B
- adapted for mounting on hydraulic power unit type H3 or H4

## Table of Contents

Technical data.....	2
Characteristic lines.....	3
Dimensions and connections.....	4
Order information.....	5
Contact details.....	6

## Technical data

### General

type	seated valve
design	intermediate plate valve
weight	0.7 kg
ambient temperature	-30 to +50 °C
mounting position	arbitrary
connection size	ISO 4401-02-01-0-05 (NG04)

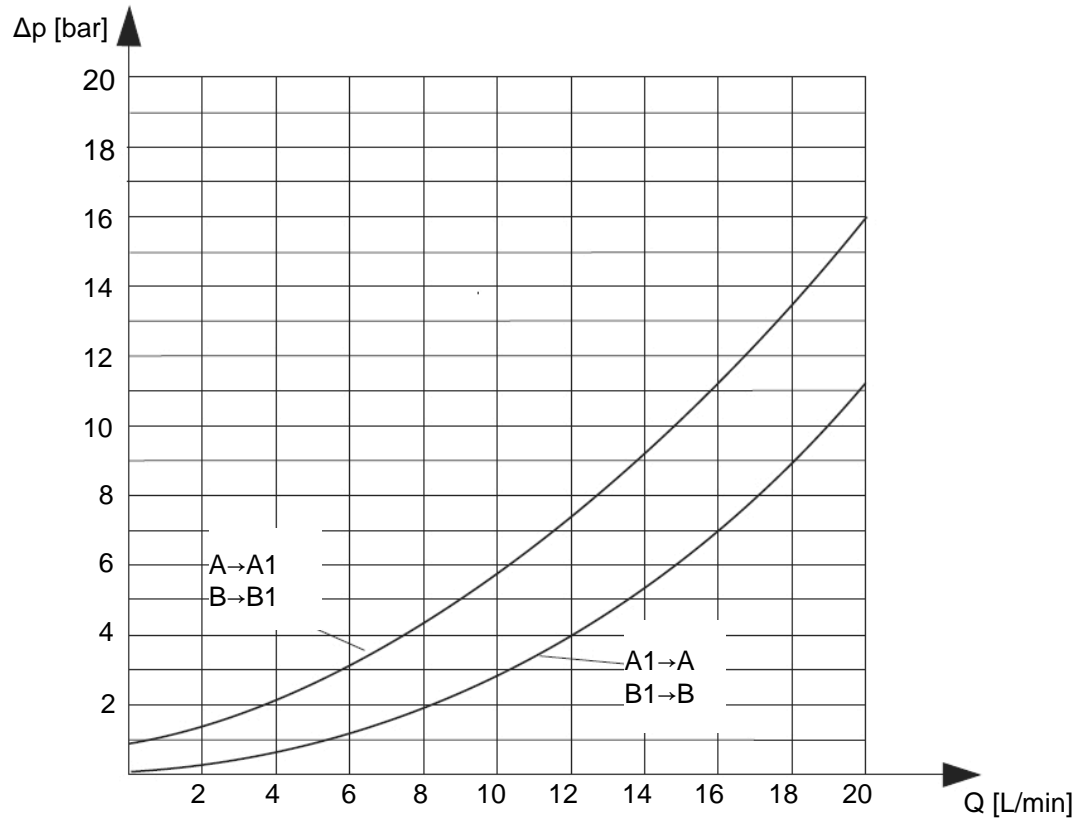
### Hydraulic parameters

Hydraulic fluid: mineral oil according to DIN 51524, other media on request

max. operating pressure	320 bar
max. volume flow	20 L/min
hydraulic fluid temperature	-25 to +70 °C
viscosity	10-600 mm <sup>2</sup> /s
permissible degree of pollution	max. class 22/19/16 according ISO 4406
filter recommendation	filter retention rate $\beta_{25} > 75$
progression ratio	1 : 3
opening pressure	min. 1 bar


## Characteristic lines

measured at +50 °C temperature of hydraulic fluid, viscosity 35 mm<sup>2</sup>/s, tolerance ±5 %






## Dimensions and connections

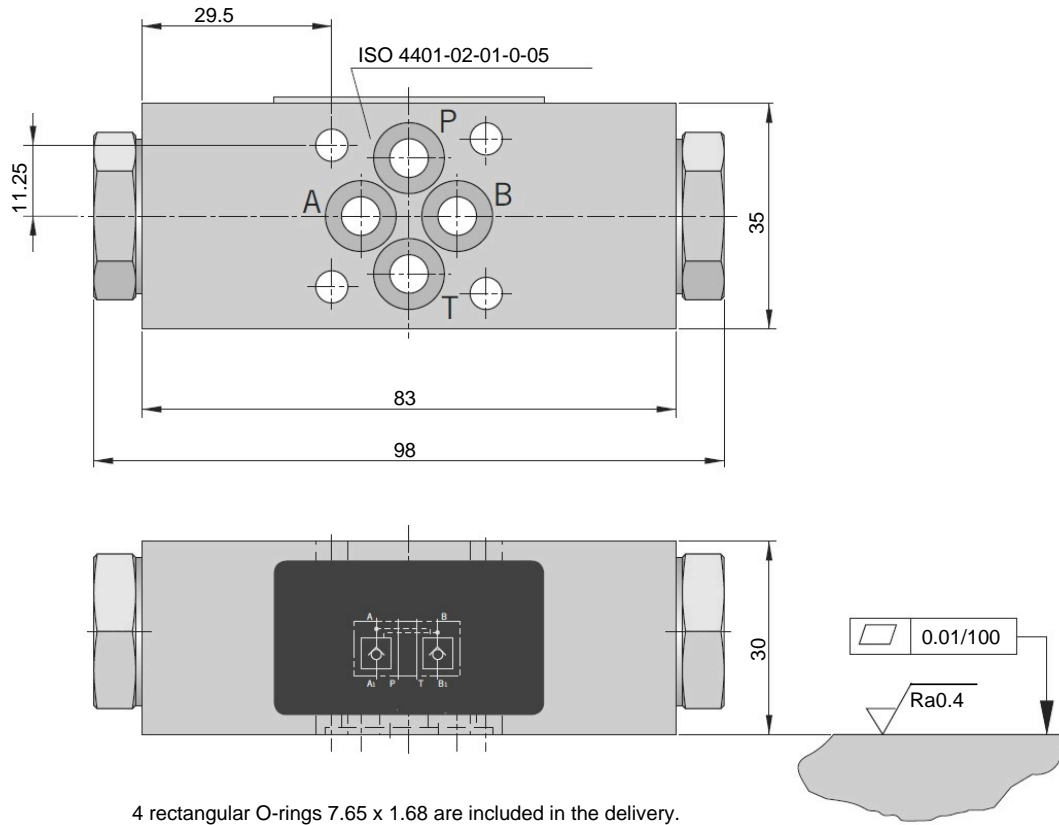Dimensions are given in mm.



## Order information

### Type code

GRV	2	ZP04	N	C
			<b>control in line</b>	<p>A check valve in line A</p>  <p>B check valve in line B</p>  <p>C check valve in line A and B</p> 
			<b>design</b>	N standard type
			<b>size</b>	4
			<b>number of check valves</b>	<p>1 single acting (only type A or B)</p> <p>2 double acting (only type C)</p>
<b>type</b>	pilot-operated double check valve			

## Contact details

### Headquarters

HAWE Hydraulik SE  
Einsteinring 17  
85605 Aschheim  
Germany

e-mail: [info@hawe.de](mailto:info@hawe.de)  
[www.hawe.com](http://www.hawe.com)

Phone: +49 (0) 89 / 37 91 00 - 1000

### Contact to the Customer Service

Phone (Head office)	+ 49 (0) 89 / 37 91 00 - 1000
Phone (Spare parts)	+ 49 (0) 89 / 37 91 00 - 1302
Phone (Customer Service)	+ 49 (0) 89 / 37 91 00 - 1491
Fax (Customer Service)	+ 49 (0) 89 / 37 91 00 - 91491
e-mail	<a href="mailto:spareparts@hawe.de">spareparts@hawe.de</a> <a href="mailto:service@hawe.de">service@hawe.de</a>