

Intermediate plate with 2-way flow control valve type SR2 (size 4)

operating pressure p_{\max} 250 bar
 volume flow V_{\max} 13.5 L/min



Product characteristics

- Use: Flow control function for regulation of outlet in line A and line B

Table of Contents

Technical data.....	2
Dimensions and connections.....	3
Order information.....	4

Technical data

General

design	modular design
weight	0.42 kg
mounting position	arbitrary
connection size	ISO4401-02-01-0-05 (NG04)


Hydraulic parameters

Hydraulic fluid: mineral oil according to DIN 51524, other media on request

max. operating pressure	250 bar
max. volume flow	13.5 L/min

Dimensions and connections


Dimensions are given in mm.

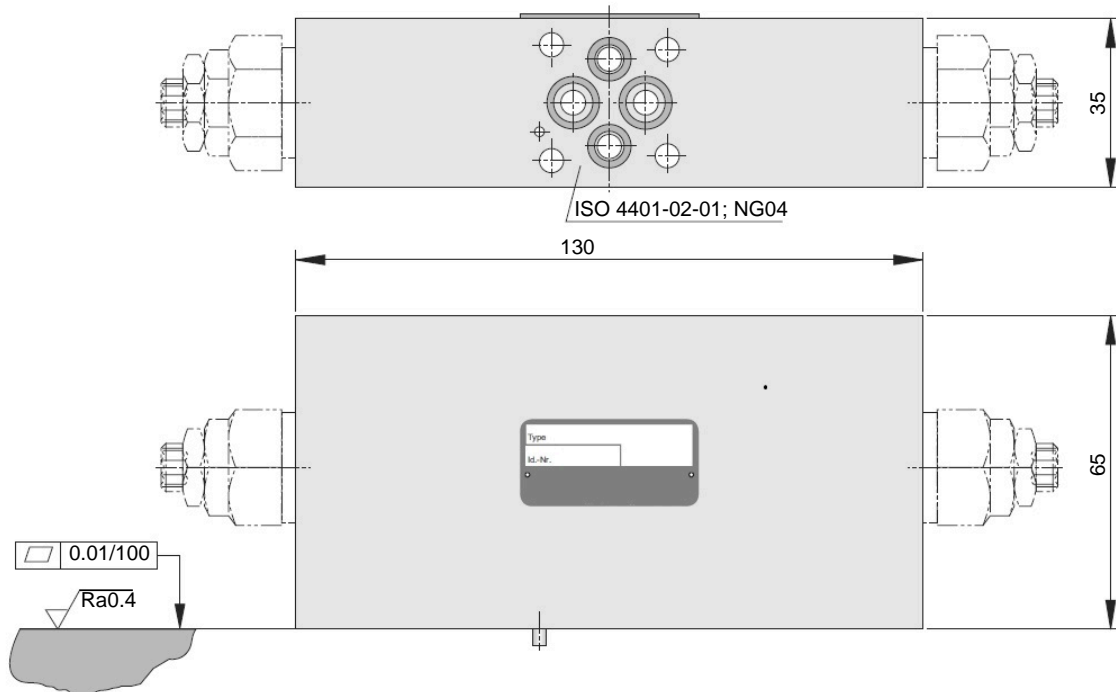

Order information

Type code

SR	2	ZP04	C	
			control in line	A check valve in line A B check valve in line B C check valve in line A and B
		size	intermediate plate design, size NG04 for flow control valves BE08	
	design	2-way		
type	flow control valve			



HAWE Hydraulik SE

Einsteinring 17 | 85609 Aschheim/München | Postfach 11 55 | 85605 Aschheim |
Germany Tel +49 89 379100-1000 | Fax +49 89 379100-91000 | info@hawe.de | www.hawe.com