

# Manual pump type H, HD and HE

## Product documentation



Operating pressure  $p_{\max}$ : 800 bar  
Displacement volume  $V_{\max. \text{ stroke}}$ : 30 cm<sup>3</sup>/stroke



© by HAWE Hydraulik SE.

The reproduction and distribution of this document as well as the use and communication of its contents to others without explicit authorisation is prohibited.

Offenders will be held liable for the payment of damages.

All rights reserved in the event of patent or utility model applications.

Brand names, product names and trademarks are not specifically indicated. In particular with regard to registered and protected names and trademarks, usage is subject to legal provisions.

HAWE Hydraulik respects these legal provisions in all cases.

Printing date / document generated on: 17.05.2021

## Contents

<b>1</b>	<b>Overview of hand pumps type H, HD, HE.....</b>	<b>4</b>
<b>2</b>	<b>Available versions, main data.....</b>	<b>5</b>
2.1	Single pump.....	5
2.2	Version with mounted oil tank.....	8
<b>3</b>	<b>Parameters.....</b>	<b>9</b>
<b>4</b>	<b>Dimensions.....</b>	<b>10</b>
4.1	Single pump.....	10
4.2	Version with mounted oil tank.....	13
<b>5</b>	<b>Assembly, operation and maintenance recommendations.....</b>	<b>14</b>
5.1	Intended use.....	14
5.2	Assembly information.....	14
5.3	Operating instructions.....	15
5.4	Maintenance information.....	15
<b>6</b>	<b>Other information.....</b>	<b>16</b>
6.1	Functional safety.....	16
6.2	Planning information.....	16

## 1 Overview of hand pumps type H, HD, HE

Hand pumps are a type of hydraulic pump. They generate a flow rate manually. The hand pumps types H, HE and HD are available for the pipe connection, the manifold mounting and optionally integrated in a tank. The hand pumps type H and HE are single-acting. They draw in oil in one direction and pump it in the opposite direction. The hand pump type HD is double-acting. It pumps and draws in the same quantity of oil in the pressure line during the forward and backward movement of the hand lever.

### Features and benefits:

- Sturdy design
- Corrosion resistance
- Zero-leakage pressure connection

### Intended applications:

- Shipbuilding
- Mining machinery
- fixture design
- Test facilities and laboratory facilities
- Emergency pump



Hand pumps type H, HD, HE

## 2 Available versions, main data

### 2.1 Single pump

Order coding examples:

H 25	S	- 400	- PYD	-EX
HD 30 P				
HE 4				

ATEX ["Table 4"](#)

Sealing specification ["Table 3"](#)

Pressure specification (bar) for version with pressure-limiting valve ["Table 2"](#)

Additional function ["Table 2"](#)

Basic type and size ["Table 1"](#)

**Table 1 Basic type and size**

Basic type and size	Pressure $p_{max}$ (bar) in P	Displacement volume $V_{stroke}$ (cm <sup>3</sup> )	Actuation torque (Nm)	Function, design
<b>Pipe connection</b>				
H 16	350	6	270	single-acting, open, suction port loadable ( $\leq 150$ bar)
H 20	220	9.4		
H 25	150	14.7		
HE 3	800	3	250	single-acting, closed
HE 4	600	4		
HD 13	350	13	250	double-acting, closed
HD 20	220	20		
HD 30	150	30		
HD 301	150	30		
<b>Manifold mounting</b>				
H 16 P	350	6	270	single-acting, open
H 20 P	220	9.4		
HE 4 P	600	4	250	single-acting, closed
HD 13 P	350	13		
HD 20 P	220	20	250	double-acting, closed
HD 30 P	150	30		

**i NOTE**

- Possible combinations with additional function, see ["Table 2"](#)
- Pressure at S acts through the pump via P to the connected consumer or the directional valve connected between. The hand lever is pushed into an end position.

**Table 2 Additional function**

Basic type and size	Additional function			
	None	Drain valve	Pressure-limiting valve	Drain valve and pressure-limiting valve
	--	A	S	AS
<b>Pipe connection</b>				
H 16	●			
H 20	●			
H 25	●			
HE 3	●		●	
HE 4	●	●	●	●
HD 13	●	●	●	●
HD 20	●	●	●	●
HD 30	●	●	●	●
HD 301			●	
<b>Manifold mounting</b>				
H 16 P	●			
H 20 P	●			
HE 4 P	●		●	
HD 13 P	●			●
HD 20 P	●			
HD 30 P	●			

**i NOTE**
**For version HD 301 please note:**

- For versions ...S and AS, the pressure at the suction port is added to the factory-set pressure.

Pressure-limiting valve type S only available fixed.

Check valves are installed in ports P and S.

**Table 3 Sealing specification, for sealing with medium contact**

Coding	Comment
No designation	Series, seals from NBR or AU, e.g. for mineral oil and HEES (synthetic ester)
PYD	Seals from FKM


**NOTE**

For the seal specification coding -PYD, the maximum operating pressure is limited to 250 bar.

**Table 4 Explosion-proof version (ATEX)**

Order coding	Certified according to	Classification / marking	Declaration of conformity	Operating and maintenance manual(s)	Permissible ambient temperature
...-EX	ATEX EU	Group II, category 2, 3: ⊕ II 2 G Ex h IIC T4 Gb ⊕ II 2 D Ex h IIIC T135°C Gb	On request	<a href="#">B ATEX</a>	-20°C...+40°C

**ATEX classification as per:**


- DIN EN ISO 80079-36:2016-12
- DIN EN ISO 80079-37:2016-12

## 2.2 Version with mounted oil tank

Ready-for-connection devices for supplying hydraulic oil to small hydraulic systems.

Containers are available for type HE and HD.

Circuit symbol:

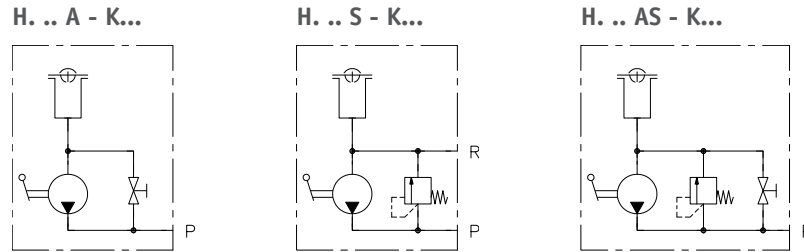

Order coding examples:

HE 4 A	-K 0,5	
HD 13 S	-K 0,35	- 250

Pressure specification (bar) for version with pressure-limiting valve

Oil tank ["Table 5"](#)

Available combinations:

- HE 4 A
- HE 4 AS
- HD 13 AS
- HD 13 S
- HD 30 A
- HD 30 AS

### Table 5 Oil tanks

Coding	Content (l)	Container material
K 0,35	0.35	Plastic
K 0,5	0.5	Plexiglass



## 3 Parameters

### General data

<b>Designation</b>	Hand pump		
<b>Design</b>	Piston pump		
<b>Model</b>	Pipe connection, manifold mounting		
<b>Material</b>	Pump housing zinc-nickel coated steel; zinc-nickel coated valve housing, hardened and ground functional inner parts		
<b>Installation position</b>	Single pump: arbitrary Version with mounted oil tank: vertical		
<b>Ports</b>	<b>P</b> = Pressure connection <b>S</b> = Suction port		
<b>Hydraulic fluid</b>	Hydraulic oil: according to part 1 to 3; ISO VG 10 to 68 according to DIN ISO 3448 Viscosity limits: min. approx. 4, max. approx. 1500 mm <sup>2</sup> /s opt. operation approx. 10... 500 mm <sup>2</sup> /s. Also suitable for biologically degradable hydraulic fluids type HEPG (polyalkylene glycol) and HEES (synthetic ester) at operating temperatures up to approx. +70°C.		
<b>Cleanliness level</b>	<b>ISO 4406</b> 20/17/14...18/15/12	<b>NAS 1638</b> 11 ... 6	<b>SAE T 490</b> 5 ... 3
<b>Temperatures</b>	Ambient: approx. -40 ... +80°C, Fluid: -25 ... +80°C, Note the viscosity range! Permissible temperature during start: -40°C (observe start-viscosity!), as long as the service temperature is at least 20K higher for the following operation. Biologically degradable pressure fluids: Observe manufacturer's specifications. By consideration of the compatibility with seal material not over +70°C. Please note restriction with ATEX-compliant version! Surrounding area: -20 ....+40°C		

### Weight


	<b>Type</b>	
	H	= 3.1 kg
	HD, HE	= 4.8 kg
	<b>Tank</b>	
	K 0,35	= + 0.2 kg
	K 0,5	= + 0.49 kg

## 4 Dimensions

All dimensions in mm, subject to change.


### 4.1 Single pump

#### Type H, pipe connection

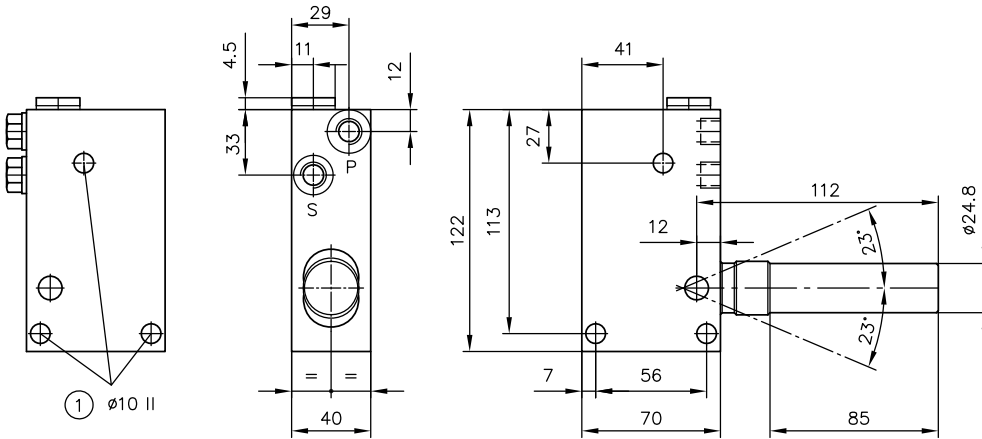

1 Fixing holes

#### Type H, manifold mounting

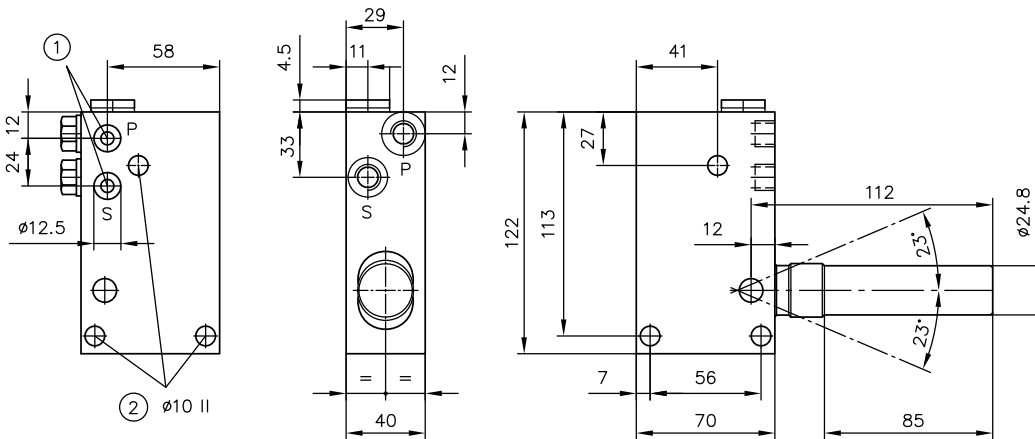

1 O-ring 2x  $\varnothing 7.59 \times 2.62$  90Sh

2 Fixing holes


#### Port (ISO 228-1) (BSPP)

P, S

G 1/4


**Type HE, HD, pipe connection**

**Hand pumps type HE 3(4)**

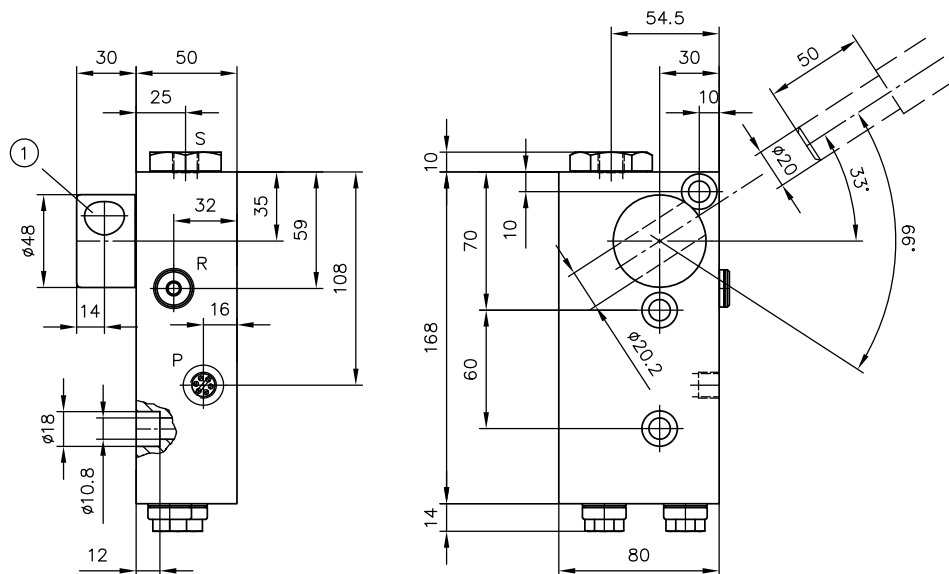

1 Hole for hand lever

**Hand pumps type HP 13(20, 30)**

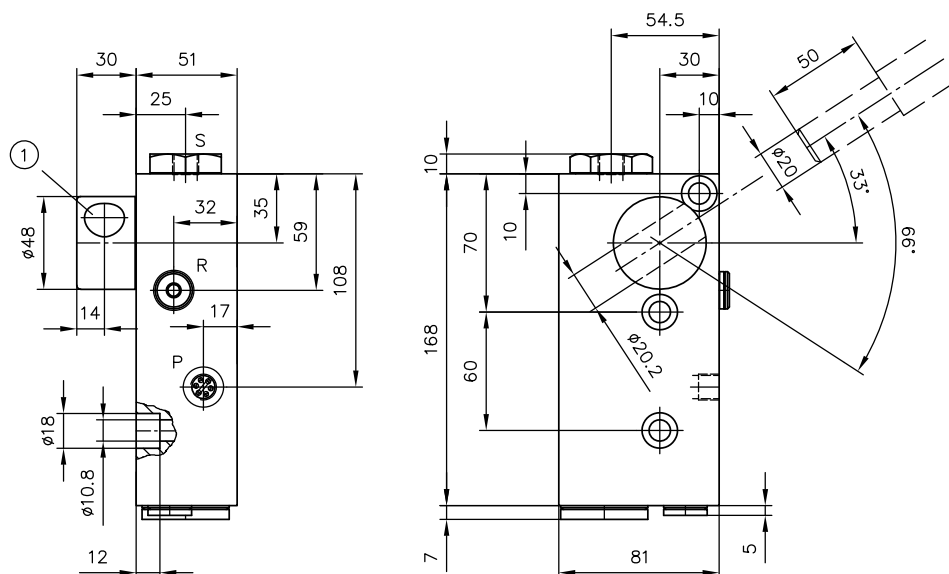

1 Hole for hand lever


**Connections (ISO 228-1) (BSPP)**

P, S G 1/4

**NOTE**


The hand lever is not included in the scope of delivery! The port S is supplied with a screw plug.

**Type HE, HD, manifold mounting**

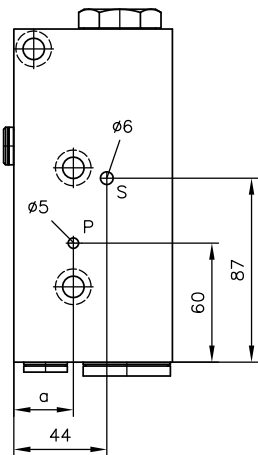

Type	a
HE	14.5
HD	30

**Type HE, HD, with additional function (A, S, AS)**

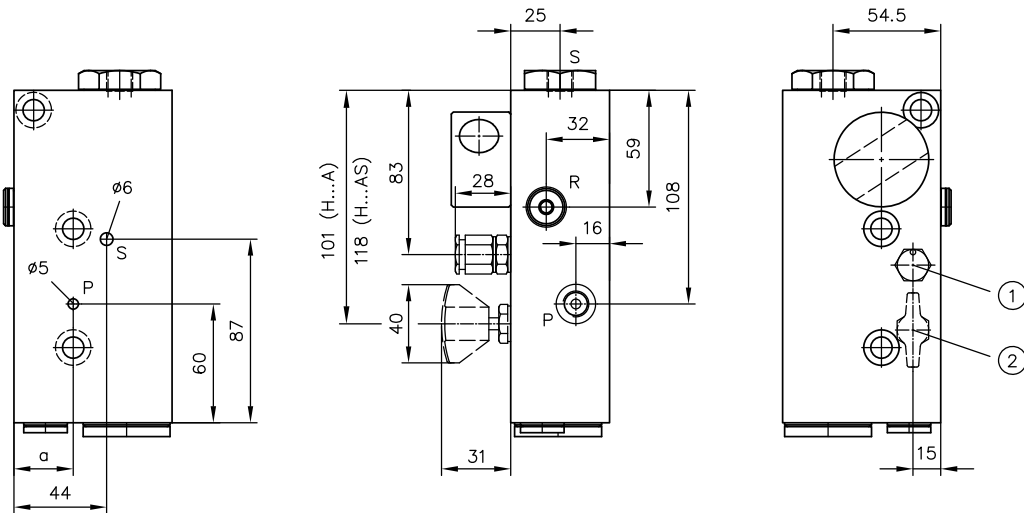

- 1 Pressure-limiting valve
- 2 Drain valve

Ports P and S are sealed for the manifold mounting versions.


## 4.2 Version with mounted oil tank

Ready-for-connection devices for supplying hydraulic oil to small hydraulic systems.


Containers are available for type HE and HD.

For the other dimensions see "[chapter 4.1](#)"

### H ... - K 0,35

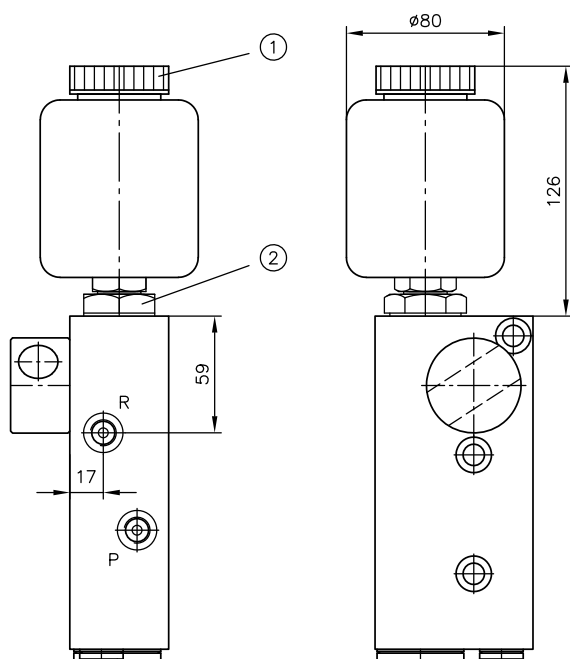

### H ... - K 0,5

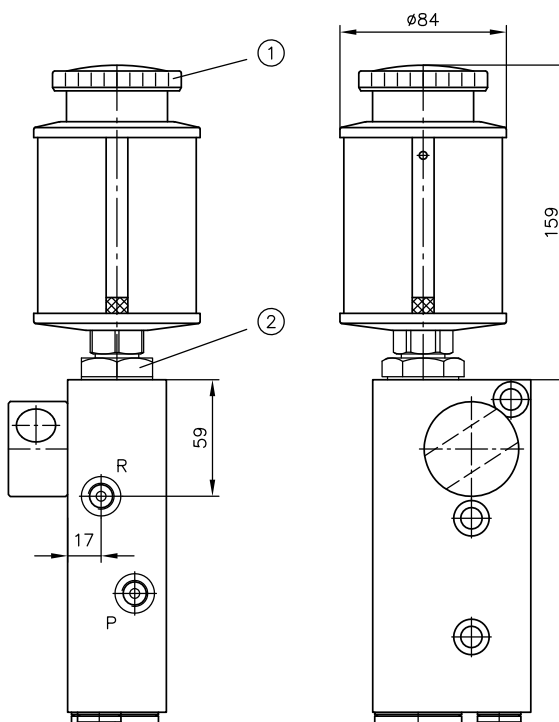

- 1 Screw-in cover for filling
- 2 Connection for oil tank uniformly G 3/8!

#### Port (ISO 228-1) (BSPP)

P, R

G 1/4

Port R absent from version with drain valve

### 5.1 Intended use

This pump is intended exclusively for use in hydraulic applications (fluid technology).

The user must observe the safety measures and warnings in this documentation.

#### Essential requirements for the product to function correctly and safely:

- All information in this documentation must be observed. This applies in particular to all safety measures and warnings.
- The product must only be assembled and put into operation by qualified personnel.
- The product must only be operated within the specified technical parameters. The technical parameters are described in detail in this documentation.
- All components must be suitable for the operating conditions in the event of application in an assembly.
- The operating and maintenance manual of the components, assemblies and the specific complete system must also always be observed.

If the product can no longer be operated safely:

1. Remove the product from operation and mark it accordingly.
- ✓ It is then not permitted to continue using or operating the product.

### 5.2 Assembly information

The product must only be installed in the complete system with standard and compliant connection components (screw fittings, hoses, pipes, fixtures etc.).

The product must be shut down correctly prior to dismantling (in particular in combination with hydraulic accumulators).

**DANGER**

**Risk to life caused by sudden movement of the hydraulic drives when dismantled incorrectly!**

Risk of serious injury or death.

- Depressurise the hydraulic system.
- Perform safety measures in preparation for maintenance.

## 5.3 Operating instructions

### Note product configuration and pressure / flow rate

The statements and technical parameters in this documentation must be strictly observed.  
The instructions for the complete technical system must also always be followed.

#### **i** NOTE

- Read the documentation carefully before usage.
- The documentation must be accessible to the operating and maintenance staff at all times.
- Keep documentation up to date after every addition or update.

### Purity and filtering of the hydraulic fluid

Fine contamination can significantly impair the function of the hydraulic component. Contamination can cause irreparable damage.

#### Examples of fine contamination include:

- Metal chips
- Rubber particles from hoses and seals
- Dirt due to assembly and maintenance
- Mechanical debris
- Chemical ageing of the hydraulic fluid

#### **i** NOTE

New hydraulic fluid from the manufacturer does not necessarily have the required level of purity.  
The hydraulic fluid must be filtered during filling.

Pay attention to the cleanliness level of the hydraulic fluid to maintain faultless operation.  
(Also see cleanliness level in [Chapter 3, "Parameters"](#)).

Additionally applicable document: [D 5488/1](#) Oil recommendations

## 5.4 Maintenance information

Conduct a visual inspection at regular intervals, but at least once per year, to check if the hydraulic connections are damaged. If external leakages are found, shut down and repair the system.

In relation to the drive (lever mechanism), there is a difference between a closed design and an open design.

In the closed design, it is inside the housing (suction chamber) and is lubricated by the oil without requiring maintenance.

In open version it is outside; occasional maintenance (cleaning and greasing) is recommended.

Clean the device surface of dust deposits and dirt at regular intervals, but at least once per year.

## **6** Other information

### **6.1 Functional safety**

The MTTFd values as described in [B 5488 ISO](#) apply.

### **6.2 Planning information**

Setting up:

1. Keep suction line short.
  2. Set up oil tank at the same level or higher than the suction ports.
- ✓ Suction lines do not run empty when idle.



## Further information

### Additional versions

- Hand pump type CH: D 7147 CH